

8-Channel Digital Output Modbus Remote I/O Module

Compact Modbus RTU remote I/O module with eight digital NPN outputs and configurable ON/OFF delay control.

8DO Modbus Remote I/O Module

Compact Modbus RTU remote I/O module with eight digital NPN outputs and configurable ON/OFF delay control.




Key Features

- 8 Digital NPN Outputs
- Configurable digital output ON delay and OFF delay
- Modbus RTU over RS-485
- Rotary address switch for address selection from 1 to 99
- Wide supported baud rates from 300 to 115200
- DIN rail mountable
- Dimensions: 110 mm × 50 mm × 55 mm (L × W × H)

ModViz – Modbus Configuration & Visualization Tool

ModViz is a powerful yet simple configuration and visualization tool designed to work seamlessly with **Veawe Modbus I/O modules**. It enables engineers, system integrators, and technicians to quickly configure, monitor, and test field devices through an intuitive graphical interface.

The software can be downloaded from <https://veawe.io/modviz/>

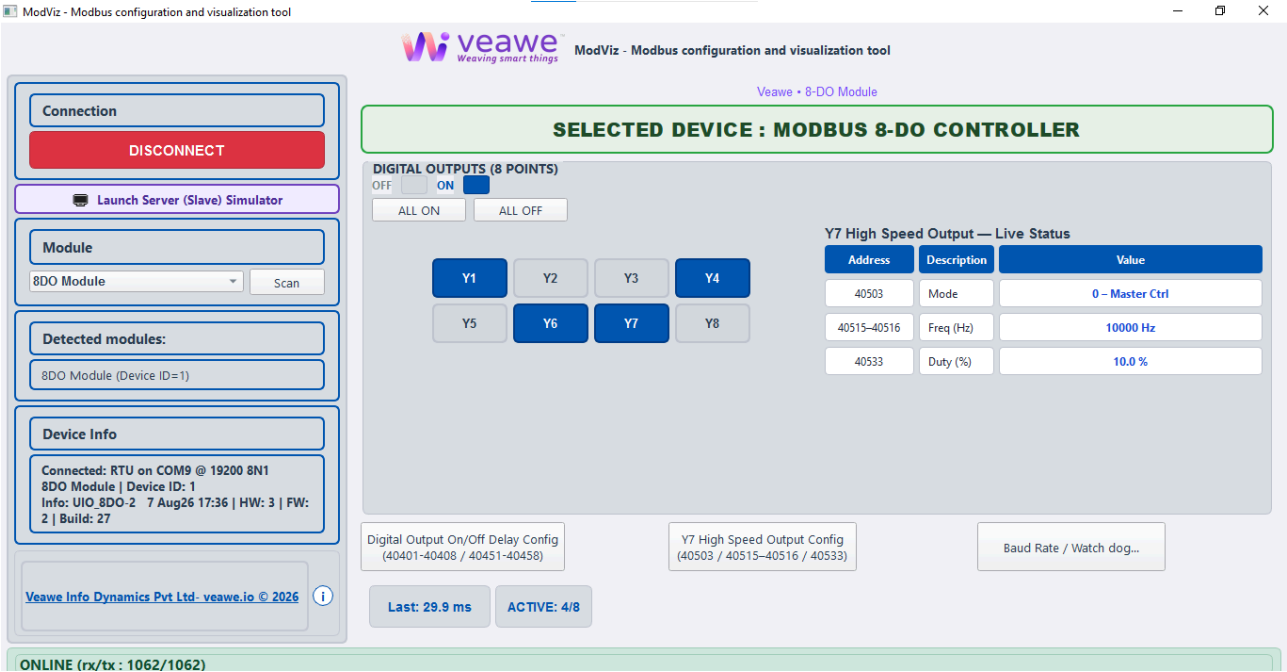

Ordering Information

Product Code	Description
UIO-8DO	8-Channel Digital Output Modbus Remote I/O Module
UIO-8DI	8-Channel Digital Input Modbus Remote I/O Module
UIO-4DI-4DO	4-Channel Digital Input / 4-Channel Digital Output Modbus Remote I/O Module
UIO-12DI-12DO	12-Channel Digital Input / 12-Channel Digital Output Modbus Remote I/O Module
UIO-24DI-24DO	24-Channel Digital Input / 24-Channel Digital Output Modbus Remote I/O Module
UIO-24DI	24-Channel Digital Input Modbus Remote I/O Module
UIO-24DO	24-Channel Digital Output Modbus Remote I/O Module

Applications

- Driving relays, solenoids, and indicator lamps from a single compact Modbus module
- Adding 8 channels of NPN output expansion to PLCs and SCADA systems in space-constrained panels
- Replacing traditional timer relays with software-configurable ON/OFF delay logic on each output channel
- Sequencing or staggering equipment start-up using per-channel output delay

Specifications

Parameter	Value
Mounting	DIN rail mountable
Dimensions	110 mm × 50 mm × 55 mm (L × W × H)

Electrical Specifications

Parameter	Value
Supply Voltage	15–24V DC
Digital Output Rating	24VDC 500mA max, NPN Control
Communication Port	RS-485


Input/Output Specifications

Parameter	Value
Digital Output Channel Count	8
Output Type	Digital NPN
ON/OFF Delay Resolution	10 ms (1 count = 10 ms)
Maximum Output Delay	655.35 seconds (65535 counts)

Isolation & Protection Specifications

Parameter	Value	Notes / Description
Supply Reverse Polarity Protection		
Supply Isolation		
Transient Voltage Clamping		
EMC & Immunity Standards		
RS-485 Bus ESD Protection		

Mechanical Dimensions

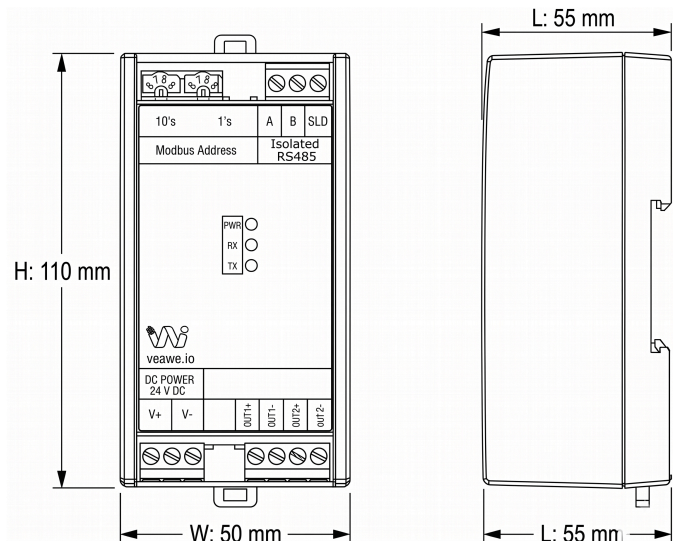

Terminal Details

Top Connector – RS-485

Pin	1	2	3
Signal	A	B	Shield

Bottom Connector – Power

Pin	1	2
Signal	24V	GND

Digital Output Connector

Pin	1	2	3	4	5	6	7	8
Signal	Y1	Y2	Y3	Y4	Y5	Y6	Y7	Y8

Wiring Diagrams

Note: All images and connection diagrams shown are for illustrative purposes only and may differ from the actual product.



Communication Interface

Protocol	Physical Layer	Default Baud Rate	Default Format
Modbus RTU	RS-485	19200	8N1

Basic Process Registers

Signal	Address	Type	Description
DO1–DO8	00001–00008	Bit	DO1 to DO8 output control and status

Supported Modbus Function Codes

Read	Write
01 – Read Coils	05 – Write Single Coil
02 – Read Discrete Inputs	06 – Write Single Register
03 – Read Holding Registers	15 – Write Multiple Coils
04 – Read Input Registers	16 – Write Multiple Registers

Register Map Overview

Function	Address Range	Type	Description
Coils	00001–00008	Bit	DO1 to DO8 digital output control and status
Coils	00401–00408	Bit	Pending DO1 to DO8 delay status and override
Holding Registers	40401–40408	int16	DO1 to DO8 ON delay
Holding Registers	40451–40458	int16	DO1 to DO8 OFF delay
Holding Registers	40501–40503	int16	HSO1 to HSO3 mode
Holding Registers	40511–40516	int32	HSO1 to HSO3 freq
Holding Registers	40531–40533	int16	HSO1 to HSO3 duty
Holding Registers	40101	int16	Modbus server (slave) address

Detailed Register Tables

Coils (0xxxx)

Digital Output Control

Address	Type	Description
00001–00008	Bit	DO1 to DO8 digital output control and status

Pending Output State

Address	Type	Description
00401–00408	Bit	Pending DO1 to DO8 state while ON/OFF delay timer is active

Writing 1 to a pending coil overrides the delay timer and immediately switches the output ON.

Holding Registers (4xxxx)

Digital Output Delay Configuration

Address	Type	Description
40401–40408	int16	DO1 to DO8 ON delay
40451–40458	int16	DO1 to DO8 OFF delay

Digital Output On/Off Delay (8 Channels)

On Delay: 40401-40408 | Off Delay: 40451-40458 (per digital output)

Use row Write to update one channel only.

Digital Output	On DO Reg	On Delay (1 ~ 10ms)	Off DO Reg	Off Delay (1 ~ 10ms)	Write
DO1	40401	100	40451	0	Write
DO2	40402	0	40452	0	Write
DO3	40403	0	40453	0	Write
DO4	40404	0	40454	0	Write
DO5	40405	0	40455	0	Write
DO6	40406	0	40456	0	Write
DO7	40407	0	40457	0	Write

Read Once

Write All

Delay Resolution: 1 = 10 ms, 100 = 1 second. Maximum value: 65535 = 655.35 seconds.

High Speed Output Configuration

Address	Type	Description
40501–40503	int16	Y5, Y6, Y7 (HSO) mode. 0 = Digital output (master controlled), 1 = PWM continuous, 2 = PWM controlled
40511–40516	int32	Y5, Y6, Y7 (HSO) PWM frequency, 0–20000 Hz
40531–40533	int16	Y5, Y6, Y7 (HSO) PWM duty %, 0–100.0% (raw 0–1000)



Communication Settings

Address	Type	Description
40101	int16	Modbus server (slave) address (switch value)
40102	int16	Baud rate selection
40103	int16	Serial format selection
40106	int16	Watchdog interval. Example: 10 = 1 second
40107	int16	Watchdog action. 0 = Modbus Watchdog Disabled, 1 = Reset Outputs on Modbus Watchdog Expire

Modbus Address (40101)

This is set using the rotary or DIP switches.

Baud Rate Register (40102) and Serial Format Register (40103)

Value	Baud Rate	Value	Baud Rate	Value	Format
0	300	7	9600	0	8N1
1	600	8	14400	1	8E1
2	1200	9	19200	2	8O1
3	1800	10	38400	3	8N2
4	2400	11	57600	4	8E2
5	4800	12	62500	5	8O2
6	7200	13	115200		

 Baud Rate / Bit Setting Config

Baud / Bit Config

Device ID (switch value) (40101):

Baud Rate (40102):

Bit Setting (40103):

Write

Watchdog Config

Modbus Watchdog Interval (40106) (1=0.1Sec):

Modbus Watchdog Action (40107):

Write

Read Config

Close

Default: 19200 baud, 8N1.

Default Settings

Setting	Default
Slave Address	As per switch position
Baud Rate	19200
Serial Format	8N1


Configuration Settings

Default Mode

Default mode is useful when communication settings are unknown.

When the rotary address switch is set to 00:


- Server address = 1
- Baud rate = 19200
- Serial format = 8N1

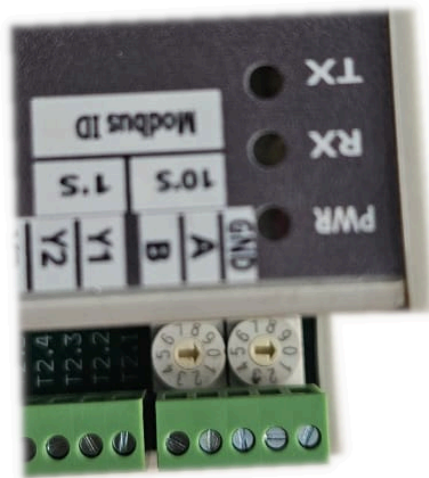

Changing to default mode does not overwrite stored settings. Stored settings remain unchanged until written through Modbus.

Watchdog Action

The Bus Watchdog automatically resets all outputs to their initial safe state if communication with the Modbus client is lost. This helps ensure safe operation during cable disconnection, client failure, or other communication faults.

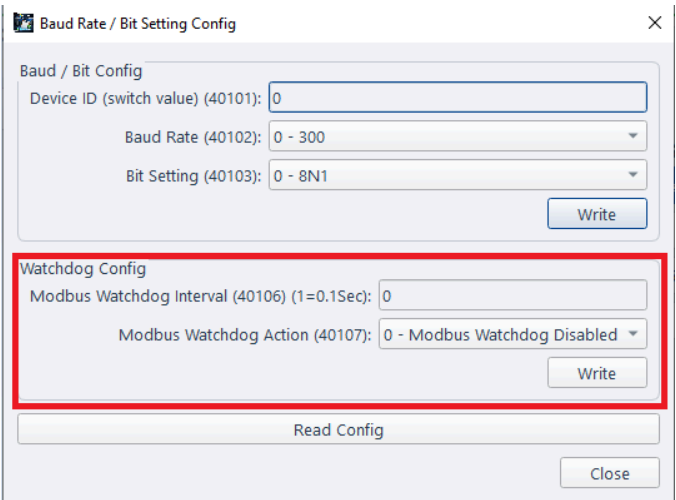

Configurable timeout: 1 to 600 seconds (100 ms resolution).

LED Indications and Diagnostics

LED	Description
Power	Module power ON indication
Tx	RS-485 transmit activity
Rx	RS-485 receive activity
Y1–Y8	Digital output status

Revision History

Revision	Date	Changes
Rev 1.0	2026-08-25	Initial datasheet, HW Version = 3, FW Version = 2

Get the latest version of this datasheet : [click here..](#)

Support

Website: www.veawe.io

Email: info@veawe.io