

Industrial LED Dual Tower Light RED/GREEN 24V AC/DC

Features

Industrial LED Dual Tower Light RED/GREEN 24V AC/DC

Features

Dual Color Tower Lamp

OFF MODE



Key Features

Ordering Information

Product Code	Description
TWR-RG-24V	Industrial LED Dual Tower Light RED/GREEN 24V AC/DC
TWR-RED-24V	Industrial LED Tower Light RED 24V AC/DC
TWR-GRN-24V	Industrial LED Tower Light Green 24V AC/DC
TWR-ORG-24V	Industrial LED Tower Light Orange 24V AC/DC
TWR-RG-12V	Industrial LED Dual Tower Light RED/GREEN 12V AC/DC

Applications

- **Industrial Automation & Process Control:** Reliable signal interfacing and device connectivity across automated production lines.
- **SCADA & PLC Integration:** Seamless communication between field instrumentation and control systems.
- **Control Panel Building:** Compact 35 mm DIN rail mounting for clean and space-efficient cabinet wiring.
- **OEM Equipment & Diagnostics:** Robust electrical protection and standard industrial ratings.

Specifications

Parameter	Value
Mounting Type	35 mm DIN Rail Mounting
Dimensions	60 mm x 50 mm x 20 mm (L x W x H)
Enclosure Material	Industrial ABS plastic
Operating Temperature	-10 °C to +60 °C
Storage Temperature	-40 °C to +85 °C
Relative Humidity	5% to 95% RH (non-condensing)


Electrical Specifications

Parameter	Specification
Operating Voltage	24V DC
Current Consumption	Low-power industrial design (< 50 mA)
Environmental Protection	IP54 / Industrial ABS Enclosure

Wiring Details & Pinouts

Color-coded wiring or molded industrial connector pinout for direct plug-and-play integration.

Mechanical Dimensions

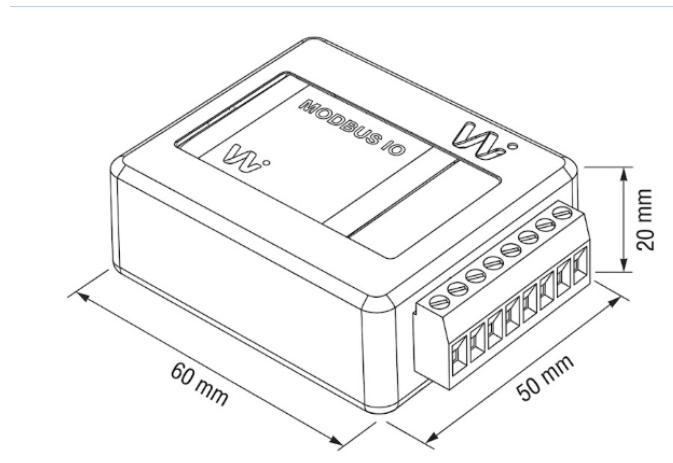

Revision History

Revision	Date	Description of Change
Rev 1.0	2026-09-09	Initial datasheet release for TWR-RG-24V

Get the latest version of this datasheet : [click here..](#)

Support

Website: www.veawe.io

Email: info@veawe.io