

4-20mA Surge Protection Device SPD 4 to 20mA

Threestage SPD20mA surge protection device
meets standard

4-20mA Surge Protection Device SPD 4 to 20mA

Threestage SPD20mA surge protection device meets standard



Key Features

- Three-stage SPD-20mA surge protection device meets standard
- Housed in a din rail panel mount case with a protected earth
- In order to work properly, it is important to have a good
- Unknown electronic device failure and misbehave in controller
- Protection provided by high energy MOV and TVS
- Replaceable modular design, DIN Rail compatible base
- All types of 20mA current loop devices, Also works for HART

Ordering Information

Product Code	Description
SPD-20MA	4-20mA Surge Protection Device SPD 4 to 20mA
SPD-24V-DC	Surge Protection Device 24V DC SPD
SPD-RS485	Surge Protection Device RS485
AC-420-420	Signal Isolator 4 20ma
USS20M24V-D	Current Source Simulator 0/4 to 20mA

Applications

- **Industrial Automation & Process Control:** Reliable signal interfacing and device connectivity across automated production lines.
- **SCADA & PLC Integration:** Seamless communication between field instrumentation and control systems.
- **Control Panel Building:** Compact 35 mm DIN rail mounting for clean and space-efficient cabinet wiring.
- **OEM Equipment & Diagnostics:** Robust electrical protection and standard industrial ratings.

Specifications

Parameter	Value
Mounting Type	35 mm DIN Rail Mounting
Dimensions	60 mm x 50 mm x 20 mm (L x W x H)
Enclosure Material	Industrial ABS plastic
Operating Temperature	-10 °C to +60 °C
Storage Temperature	-40 °C to +85 °C
Relative Humidity	5% to 95% RH (non-condensing)


Electrical Specifications

Parameter	Specification
Operating Voltage	24V DC
Nominal Discharge Current (In)	5 kA (8/20 µs impulse)
Max Discharge Current (Imax)	10 kA (8/20 µs impulse)
Response Time (tA)	< 1 ns (TVS)
Protection Technology	Multi-stage Hybrid

Isolation & Protection Specifications

Parameter	Value	Standard / Notes
Voltage Clamping Level	Low Clamping	High-efficiency multi-stage surge attenuation
Surge Standard	IEC 61643-21 / IEC 61000-4-5	Class-compliant industrial transient immunity
Grounding Interface	Integrated PE Terminal	Low-impedance earth DIN rail connection

Mechanical Dimensions

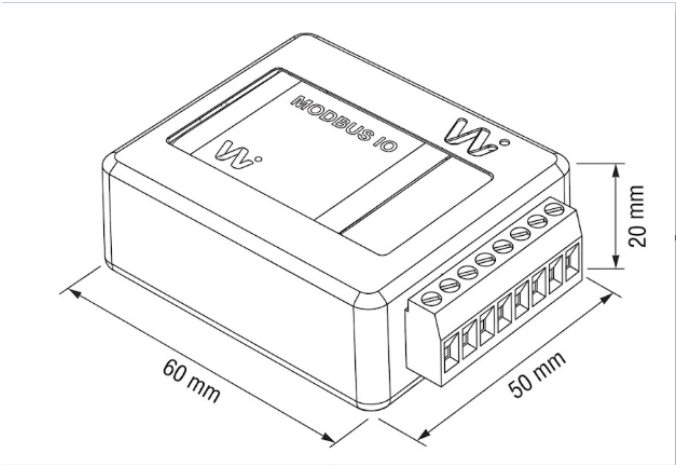

Terminal Details & Wiring

Connect unprotected field lines to the Line In side and protected equipment to Line Out. Ensure solid PE ground connection.

Revision History

Revision	Date	Description of Change
Rev 1.0	2026-09-09	Initial datasheet release for SPD-20MA

Get the latest version of this datasheet : [click here..](#)

Support

Website: www.veawe.io

Email: info@veawe.io